

Programmable Power Supplies



A lot to offer in 2U: $\geq^+$ Series

High density, highly flexible, many applications



Product features

- Same package size (2U format) for all models
- Benchtop and rack mounted (19")
- 16 bit resolution and extremely fast programming response
- Integrated Arbitrary waveform generation with internal storage for up to four individual sequencing curves
- High functionality for a wide variety of test applications
- Extensively equipped (including software package)
- Interface: USB, RS-232 & RS-485, analogue control & monitoring
- Optional: LAN, IEEE, isolated analogue interfaces & front panel output sockets



Specifications

- 200, 400, 600, 800W models in 2U
- Input voltage:
85-265Vac single phase, 47-63Hz
- Output voltage 10, 20, 36, 60, 100, 160, 320, 375, 650Vdc
- Up to 89% efficiency
- User programmable signal pins
- 5 years warranty

Typical applications

- Test and measurement
- Part and component testing
- ATE and laser diodes
- Automotive

Product Summary Z+ 200-800W

			Interface					
Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Standard	Wide Chassis				Model
			LAN	L *	L2*	IEEE	IS510/IS420	
0~10	0~20	200	◦	◦	◦	◦	◦	Z10-20
	0~40	400	◦	◦	◦	◦	◦	Z10-40
	0~60	600	◦	◦	◦	◦	◦	Z10-60
	0~72	720	◦	◦	◦	◦	◦	Z10-72
0~20	0~10	200	◦	◦	◦	◦	◦	Z20-10
	0~20	400	◦	◦	◦	◦	◦	Z20-20
	0~30	600	◦	◦	◦	◦	◦	Z20-30
	0~40	800	◦	◦	◦	◦	◦	Z20-40
0~36	0~6	216	◦	◦	◦	◦	◦	Z36-6
	0~12	432	◦	◦	◦	◦	◦	Z36-12
	0~18	648	◦	◦	◦	◦	◦	Z36-18
	0~24	864	◦	◦	◦	◦	◦	Z36-24
0~60	0~3.5	210	◦	◦	◦	◦	◦	Z60-3.5
	0~7	420	◦	◦	◦	◦	◦	Z60-7
	0~10	600	◦	◦	◦	◦	◦	Z60-10
	0~14	840	◦	◦	◦	◦	◦	Z60-14
0~100	0~2	200	◦		◦	◦	◦	Z100-2
	0~4	400	◦		◦	◦	◦	Z100-4
	0~6	600	◦		◦	◦	◦	Z100-6
	0~8	800	◦		◦	◦	◦	Z100-8

Interface: ° = Optional

Warranty: 5 Years

Standard built-in: USB, RS-232/RS-485

Dimensions (W x H x D): Z+ Standard = 1/6 19" x 2U x 405 mm
Z+ Wide Chassis = 1/4 19" x 2U x 405 mm (Output Cover is included)

*L: max. 24A or 60V
L2: CAT III Type: max. 24A or 650V

			Interface					
Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Standard	Wide Chassis				Model
			LAN	L*	L2*	IEEE	IS510/IS420	
0~160	0~1.3	208	◦		◦	◦	◦	Z160-1.3
	0~2.6	416	◦		◦	◦	◦	Z160-2.5
	0~4	640	◦		◦	◦	◦	Z160-4
	0~5	800	◦		◦	◦	◦	Z160-5
0~320	0~0.65	208	◦		◦	◦	◦	Z320-0.65
	0~1.3	416	◦		◦	◦	◦	Z320-1.3
	0~2	640	◦		◦	◦	◦	Z320-2
	0~2.5	800	◦		◦	◦	◦	Z320-2.5
0~375	0~2.2	825	◦		◦	◦	◦	Z375-2.2
0~650	0~0.32	208	◦		◦	◦	◦	Z650-0.32
	0~0.64	416	◦		◦	◦	◦	Z650-0.64
	0~1	650	◦		◦	◦	◦	Z650-1
	0~1.25	812	◦		◦	◦	◦	Z650-1.25

Product-Code Z+ 200-800W

Z

-

36

-

12

-

-

-

Series Name

Output Voltage
(0~36V)

Output Current
(0~12A)

Interface Options

Front Panel Output Jacks

AC Cable

Interface Options (Factory installed)

USB, RS-232/RS-485 Interface, analogue Interface (non-isolated)

P/N:

-

Interface Options (Optional)

LAN Interface (Complies with **LXI** class C)

IEEE 488.2 (GPIB) Interface

0-5V/10V: analogue Interface (isolated)

4-20mA: analogue Interface (isolated)

Front Panel Output Jack (Optional)

60V or 24A max.

CAT III type: 650V or 24A max.

P/N:

LAN

IEEE

IS510

IS420

AC Cable (Optional)

Europe

United Kingdom

North America

Middle East

P/N:

E

GB

U

I

P/N:

L

L2

The next Generation **GENESYS™** Series

High performance, high functionality, highest power density



Product features

- Industry leading power density
- Constant voltage/constant current/constant power limit control
- Scalable power systems up to 20kW
- Adjustable slew rate control
- Arbitrary waveform function and profile storage
- Internal resistance control
- RS-232 & RS-485, USB, LAN (**LXI** 1.5) and isolated analogue interfaces as standard
- Optional Interface slot for IEEE 488.2 SCPI, Anybus interface
- Options: blank front panel, dust filter cover
- Extension: **I-SINK** function (electronic power sink)

Specifications

- 1.7, 2.7, 3.4, 5kW models in 1U
- 10kW models in 2U
- 15kW models in 3U
- Output voltage up to 600V, current up to 1500A
- Up to 92% efficiency
- 5 years warranty

Typical applications

- Test and measurement
- Automation
- Component Device Testing
- Automotive
- Burn-in
- Medical Imaging

More about our complete range of programmable power supplies at: www.emea.tdk-lambda.com

GENESYS™ Family Output Voltage and Current

Model	G (Std Front Panel Display) / GB (Blank Front Panel Display)		GSP (Scalable Power)	
Rated Power	1.7kW	5kW	10kW	15kW
Output Voltage [Vdc]	Output Current [A]			
0~10	0~170	0~500	0~1000	0~1500
0~20	0~85	0~250	0~500	0~750
0~30	0~56	0~170	0~340	0~510
0~40	0~42	0~125	0~250	0~375
0~60	0~28	0~85	0~170	0~255
0~80	0~21	0~65	0~130	0~195
0~100	0~17	0~50	0~100	0~150
0~150	0~11.2	0~34	0~68	0~102
0~300	0~5.6	0~17	0~34	0~51
0~600	0~2.8	0~8.5	0~17	0~25.5
Weight [kg/lb]	5/11	7.5/16.5	15.5/34.2	23.5/51.8

AC Input Range

Rated Power	1.7kW	5kW	10kW	15kW
1Ø, 85-265Vac	*	N/A	N/A	N/A
3P208	N/A	*	*	*
3P400	N/A	*	*	*
3P480	N/A	*	*	*

Product Summary 1U GENESYS+™ G (1.7-5kW)

Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Interface					Dimensions*	Model
			RS-232/ RS-485/USB	Isolated Analogue	LAN	IEEE	Anybus		
0~10	0~170	1700	•	•	•	◦	◦	19" x 1U x 554 mm	G10-170
	0~265	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G10-265**
	0~340	3400	•	•	•	◦	◦	19" x 1U x 554 mm	G10-340**
	0~500	5000	•	•	•	◦	◦	19" x 1U x 554 mm	G10-500
0~20	0~85	1700	•	•	•	◦	◦	19" x 1U x 554 mm	G20-85
	0~135	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G20-135**
	0~170	3400	•	•	•	◦	◦	19" x 1U x 554 mm	G20-170**
	0~250	5000	•	•	•	◦	◦	19" x 1U x 554 mm	G20-500
0~30	0~56	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G30-56
	0~90	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G30-90**
	0~112	3360	•	•	•	◦	◦	19" x 1U x 554 mm	G30-112**
	0~170	5100	•	•	•	◦	◦	19" x 1U x 554 mm	G30-170
0~40	0~42	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G40-42
	0~68	2720	•	•	•	◦	◦	19" x 1U x 554 mm	G40-68**
	0~85	3400	•	•	•	◦	◦	19" x 1U x 554 mm	G40-85**
	0~125	5000	•	•	•	◦	◦	19" x 1U x 554 mm	G40-125
0~60	0~28	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G60-28
	0~45	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G60-45**
	0~56	3360	•	•	•	◦	◦	19" x 1U x 554 mm	G60-56**
	0~85	5100	•	•	•	◦	◦	19" x 1U x 554 mm	G60-85

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years

Dimensions (W x H x D): 19" x 1U x 442 mm (w/o bussbar, cover), *with bussbar, cover

** Coming soon

Product Summary 1U GENESYS+™ G (1.7-5kW)

Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Interface					Dimensions*	Model
			RS-232/ RS-485/USB	Isolated Analogue	LAN	IEEE	Anybus		
0~80	0~21	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G80-21
	0~34	2720	•	•	•	◦	◦	19" x 1U x 554 mm	G80-34**
	0~42	3360	•	•	•	◦	◦	19" x 1U x 554 mm	G80-42**
	0~65	5200	•	•	•	◦	◦	19" x 1U x 554 mm	G80-65
0~100	0~17	1700	•	•	•	◦	◦	19" x 1U x 554 mm	G100-17
	0~27	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G100-27**
	0~34	3400	•	•	•	◦	◦	19" x 1U x 554 mm	G100-34**
	0~50	5000	•	•	•	◦	◦	19" x 1U x 554 mm	G100-50
0~150	0~11.2	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G150-11.2
	0~18	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G150-18**
	0~22.5	3375	•	•	•	◦	◦	19" x 1U x 554 mm	G150-22.5**
	0~34	5100	•	•	•	◦	◦	19" x 1U x 554 mm	G150-34
0~300	0~5.6	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G300-5.6
	0~9	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G300-9**
	0~11.5	3375	•	•	•	◦	◦	19" x 1U x 554 mm	G300-11.5**
	0~17	5100	•	•	•	◦	◦	19" x 1U x 554 mm	G300-17
0~600	0~2.8	1680	•	•	•	◦	◦	19" x 1U x 554 mm	G600-2.8
	0~4.5	2700	•	•	•	◦	◦	19" x 1U x 554 mm	G600-4.5**
	0~5.6	3360	•	•	•	◦	◦	19" x 1U x 554 mm	G600-5.6**
	0~8.5	5100	•	•	•	◦	◦	19" x 1U x 554 mm	G600-8.5

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years

Dimensions (W x H x D): 19" x 1U x 442 mm (w/o bussbar, cover), *with bussbar, cover

** Coming soon

Product-Code

GENESYS+™ G (1.7kW)

G		-	10	-	170	-		-	
Series Name			Output Voltage (0~10V)		Output Current (0~170A)		Interface Options		Accessories Options
Front Panel Type		P/N:							
Standard		-							
Blank Front Panel		B							

AC Inputs (All Models): Single Phase: 85~265Vac

GENESYS+™ G (2.7/3.4kW) *coming soon*

G		-	10	-	340	-		-		-	
Series Name			Output Voltage (0~10V)		Output Current (0~340A)		Interface Options		AC Input Options		Accessories Options
Front Panel Type		P/N:									
Standard		-									
Blank Front Panel		B									

GENESYS+™ G (5kW)

G		-	10	-	500	-		-		-	
Series Name			Output Voltage (0~10V)		Output Current (0~500A)		Interface Options		AC Input Options		Accessories Options
Front Panel Type		P/N:									
Standard		-									
Blank Front Panel		B									

Interface Options (Factory installed)

RS-232/RS-485: analogue Interface (isolated)
 USB 2.0
 LAN Interface (Complies with **LYI** class C)
 0-5V/10V: analogue Interface (isolated)

P/N:

-
-
-
-

Interface Options (Optional)

IEEE 488.2 (GPIB) Interface
 Modbus-TCP *coming soon*
 EtherCat *coming soon*

P/N:

IEEE
 MDDBS
 ECAT

AC Input Options

Single Phase 170~265Vac *2.7/3.4 kW only*
 Three Phase 170~265Vac
 Three Phase 342~460Vac
 Three Phase 342~528Vac

P/N:

1P208
 3P208
 3P400
 3P480

Accessories Options

Printed User Manual
 (User Manual & GUI on CD as Standard)
 Bus Paralleling Cable

P/N:

M
 P



Product Summary GENESYS+™ GSP (2U 10kW / 3U 15kW)

Output Voltage [Vdc]	Output Current [A]	Output Power [kW]	Interface					Dimensions*	Model
			RS-232/ RS-485/USB	Isolated Analogue	LAN	IEEE	Anybus		
0~10	0~1000	10	•	•	•	◦	◦	19" x 2U x 665 mm	GSP10-1000
	0~1500	15	•	•	•	◦	◦	19" x 3U x 665 mm	GSP10-1500
0~20	0~500	10	•	•	•	◦	◦	19" x 2U x 665 mm	GSP20-500
	0~750	15	•	•	•	◦	◦	19" x 3U x 665 mm	GSP20-750
0~30	0~340	10.2	•	•	•	◦	◦	19" x 2U x 665 mm	GSP30-340
	0~510	15.3	•	•	•	◦	◦	19" x 3U x 665 mm	GSP30-510
0~40	0~250	10	•	•	•	◦	◦	19" x 2U x 665 mm	GSP40-250
	0~375	15	•	•	•	◦	◦	19" x 3U x 665 mm	GSP40-375
0~60	0~170	10.2	•	•	•	◦	◦	19" x 2U x 665 mm	GSP60-170
	0~255	15.3	•	•	•	◦	◦	19" x 3U x 665 mm	GSP60-255
0~80	0~130	10.4	•	•	•	◦	◦	19" x 2U x 665 mm	GSP80-130
	0~195	15.6	•	•	•	◦	◦	19" x 3U x 665 mm	GSP80-195
0~100	0~100	10	•	•	•	◦	◦	19" x 2U x 665 mm	GSP100-100
	0~150	15	•	•	•	◦	◦	19" x 3U x 665 mm	GSP100-150
0~150	0~68	10.2	•	•	•	◦	◦	19" x 2U x 665 mm	GSP150-68
	0~102	15.3	•	•	•	◦	◦	19" x 3U x 665 mm	GSP150-102
0~300	0~34	10.2	•	•	•	◦	◦	19" x 2U x 665 mm	GSP300-34
	0~51	15.3	•	•	•	◦	◦	19" x 3U x 665 mm	GSP300-51
0~600	0~17	10.2	•	•	•	◦	◦	19" x 2U x 665 mm	GSP600-17
	0~25.5	15.3	•	•	•	◦	◦	19" x 3U x 665 mm	GSP600-25.5

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years

Dimensions (W x H x D): 19" x 2/3U x 442 mm (w/o bussbar, cover), *with bussbar enclosure

Product-Code

GENESYS+™ GSP (10/15kW)

G	SP	-	10	-	1500	-		-		-	
Series Name			Output Voltage (0~10V)		Output Current (0~1500A)		Interface Options		AC Input Options		Accessories Options
Front Panel Type		P/N:									
Standard		-									
Blank Front Panel		B									



Interface Options (Factory installed)

RS-232/RS-485: analogue Interface (isolated)

USB 2.0

LAN Interface (Complies with **LV** class C)

0-5V/10V: analogue Interface (isolated)

P/N:

-

-

-

-

Interface Options (Optional)

IEEE 488.2 (GPIB) Interface

Modbus-TCP *coming soon*

EtherCat *coming soon*

P/N:

IEEE

MDBS

ECAT

AC Input Options

Three Phase 170~265Vac

Three Phase 342~460Vac

Three Phase 342~528Vac

P/N:

3P208

3P400

3P480

Accessories Options

Printed User Manual

(User Manual & GUI on CD as Standard)

P/N:

M

The powerful **Genesys™** Series

Exceptional Reliability and Performance – up to 1500V



Product features

- Benchtop and rack mounted (19")
- Auto-restart/safe-start user-selectable
- Interfaces: RS-232 & RS-485, analogue control & monitoring
- Optional: LAN, IEEE, Power Sink and Fast Speed
- Extension: **I-SINK** function (electronic power sink)

Specifications

- 750, 1500, 2400W models in 1U
- 3.3, 5kW models in 2U
- 10, 15kW models in 3U
- Active/passive power factor correction (single-phase & three-phase AC input)
- Output voltage up to 1500V, output current up to 1000A
- Up to 88% efficiency
- 5 years warranty

Typical applications

- Test and measurement
- Automation
- Part and component testing
- Automotive
- Burn-in

More about our complete range of programmable power supplies at: www.emea.tdk-lambda.com

Product Summary 1U GENH 750W (GEN 750W-2.4kW)

			Interface						Dimensions	Model
Output Voltage [Vdc]	Output Current [A]	Output Power [W]	RS-232/ RS-485	Analogue	LAN	IEEE	IS510/IS420 Isolated analogue	PSINK		
0~6	0~100	600	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH6-100
	0~100	600	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN6-100
	0~200	1200	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN6-200
0~8	0~90	720	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH8-90
	0~90	720	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN8-90
	0~180	1440	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN8-180
	0~300	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN8-300
0~10	0~240	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN10-240
0~12.5	0~60	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH12.5-60
	0~60	750	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN12.5-60
	0~120	1500	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN12.5-120
0~16	0~150	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN16-150
0~20	0~38	760	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH20-38
	0~38	760	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN20-38
	0~76	1520	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN20-76
	0~120	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN20-120
0~30	0~25	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH30-25
	0~25	750	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN30-25
	0~50	1500	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN30-50
	0~80	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN30-80

			Interface							
Output Voltage [Vdc]	Output Current [A]	Output Power [W]	RS-232/ RS-485	Analogue	LAN	IEEE	IS510/IS420 Isolated analogue	PSINK	Dimensions	Model
0~40	0~19	760	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH40-19
	0~19	760	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN40-19
	0~38	1520	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN40-38
	0~60	2400	•	•	◦	◦	◦		19" x 1U x 486 mm	GEN40-60
0~50	0~30	1500	•	•	◦	◦	◦		19" x 1U x 498mm	GEN50-30
0~60	0~12.5	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH60-12.5
	0~12.5	750	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN60-12.5
	0~25	1500	•	•	◦	◦	◦	◦	19" x 1U x 498 mm	GEN60-25
	0~40	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN60-40
0~80	0~9.5	760	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH80-9.5
	0~9.5	760	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN80-9.5
	0~19	1520	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN80-19
	0~30	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN80-30

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure.



Product Summary 1U GENH 750W (GEN 750W-2.4kW)

			Interface						Dimensions	Model
Output Voltage [Vdc]	Output Current [A]	Output Power [W]	RS-232/ RS-485	Analogue	LAN	IEEE	IS510/IS420 Isolated analogue	PSINK		
0~100	0~7.5	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH100-7.5
	0~7.5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN100-7.5
	0~15	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN100-15
	0~24	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN100-24
0~150	0~5	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH150-5
	0~5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN150-5
	0~10	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN150-10
	0~16	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN150-16
0~300	0~2.5	750	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH300-2.5
	0~2.5	750	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN300-2.5
	0~5	1500	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN300-5
	0~8	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN300-8
0~600	0~1.3	780	•	•	◦	◦	◦		½ 19" x 1U x 480 mm	GENH600-1.3
	0~1.3	780	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN600-1.3
	0~2.6	1560	•	•	◦	◦	◦		19" x 1U x 498 mm	GEN600-2.6
	0~4	2400	•	•	◦	◦	◦		19" x 1U x 506 mm	GEN600-4

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure.

Product-Code

GENH 750W 1U

GEN H - 600 - 1.3 - -

Series Name Output Voltage (0~600V) Output Current (0~1.3A) Interface Options AC Cable

GEN 2400W 1U

GEN - 40 - 60 - -

Series Name Output Voltage (0~40V) Output Current (0~60A) Interface Options AC Input Options

GEN 750/1500 W with Power Sink

GEN - 60 - 25 - - PSINK - LN

Series Name Output Voltage (0~60V) Output Current (0~25A) Interface Options Low Noise Up to 60V only

Interface Options (Factory installed)

RS-232/RS-485 Interface, analogue Interface (non-isolated)

P/N:
-

Interface Options (Optional)

LAN Interface (Complies with **LXI** class C)

IEEE 488.2 (GPIB) Interface

0-5V/10V: analogue Interface (isolated)

4-20mA: analogue Interface (isolated)

P/N:
LAN
IEEE
IS510
IS420

Power Sink

750/1500W, 12.5-60V models

P/N:
PSINK

AC Cable (Optional) 750W only

Europe

United Kingdom

North America

Middle East

P/N:
E
GB
U
I

AC Input Options

Single Phase 230Vac

Three Phase 208Vac

P/N:
1P230
3P208



Product Summary 2U GEN 3.3-5.5kW

Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Interface						Dimensions	Model
			RS-232/ RS-485	Analogue	LAN	IEEE	Isolated analogue	FAST SPEED		
0~8	0~400	3200	•	•	○	○	○		19" x 2U x 498 mm	GEN8-400
	0~600	4800	•	•	○	○	○		19" x 2U x 518 mm	GEN8-600
0~10	0~330	3300	•	•	○	○	○		19" x 2U x 498 mm	GEN10-330
	0~500	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN10-500
0~15	0~220	3300	•	•	○	○	○		19" x 2U x 498 mm	GEN15-220
0~16	0~310	4960	•	•	○	○	○		19" x 2U x 498 mm	GEN16-310
0~20	0~165	3300	•	•	○	○	○	○	19" x 2U x 498 mm	GEN20-165
	0~250	5000	•	•	○	○	○	○	19" x 2U x 518 mm	GEN20-250
0~30	0~110	3300	•	•	○	○	○	○	19" x 2U x 498 mm	GEN30-110
	0~170	5100	•	•	○	○	○	○	19" x 2U x 518 mm	GEN30-170
0~40	0~85	3400	•	•	○	○	○	○	19" x 2U x 498 mm	GEN40-85
	0~125	5000	•	•	○	○	○	○	19" x 2U x 518 mm	GEN40-125
0~60	0~55	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN60-55
	0~85	5100	•	•	○	○	○	○	19" x 2U x 518 mm	GEN60-85
0~80	0~42	3360	•	•	○	○	○		19" x 2U x 518 mm	GEN80-42
	0~65	5200	•	•	○	○	○		19" x 2U x 518 mm	GEN80-65
0~100	0~33	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN100-33
	0~50	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN100-50
0~150	0~22	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN150-22
	0~34	5100	•	•	○	○	○		19" x 2U x 518 mm	GEN150-34
0~200	0~16.5	3300	•	•	○	○	○		19" x 2U x 518 mm	GEN200-16.5
	0~25	5000	•	•	○	○	○		19" x 2U x 518 mm	GEN200-25

Output Voltage [Vdc]	Output Current [A]	Output Power [W]	Interface						Dimensions	Model
			RS-232/ RS-485	Analogue	LAN	IEEE	Isolated analogue	FAST SPEED		
0~300	0~11	3300	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN300-11
	0~17	5100	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN300-17
0~400	0~13	5200	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN400-13
0~500	0~10	5000	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN500-10
0~600	0~5.5	3300	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN600-5.5
	0~8.5	5100	•	•	◦	◦	◦		19" x 2U x 518 mm	GEN600-8.5

Interfaces: • = Standard Warranty: 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure.
◦ = Optional

Product-Code

GEN 3.3kW 2U

GEN

-

8

-

400

-

-

-

F

Series Name

Output Voltage (0~8V)

Output Current (0~400A)

Interface Options

AC Input Options

Fast Speed Option

GEN 5kW 2U

GEN

-

10

-

500

-

-

Series Name

Output Voltage (0~10V)

Output Current (0~500A)

Interface Options

AC Input Options

Interface Options (Factory installed)

RS-232/RS-485 Interface, analogue Interface (non-isolated)

Interface Options (Optional)

LAN Interface (Complies with **LXI** class C)

IEEE 488.2 (GPIB) Interface

0-5V/10V: analogue Interface (isolated)

4-20mA: analogue Interface (isolated)

AC Input Options

Single Phase 230Vac *3.3kW only*

Three Phase 208Vac

Three Phase 400Vac

Option

Fast Speed

P/N:

-

P/N:

LAN

IEEE

IS510

IS420

P/N:

1P230

3P208

3P400

P/N:

F

Product Summary 3U GEN 10-15kW

Output Voltage [Vdc]	Output Current [A]	Output Power [kW]	Interface					Dimensions	Model
			RS-232/ RS-485	Analogue	LAN	IEEE	Isolated analogue		
0~7.5	0~1000	7.5	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN7.5-1000
0~10	0~1000	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN10-1000
0~12.5	0~800	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN12.5-800
0~20	0~500	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN20-500
0~25	0~400	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN25-400
0~30	0~333	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN30-333
	0~500	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN30-500
0~40	0~250	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN40-250
	0~375	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN40-375
0~50	0~200	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN50-200
	0~300	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN50-300
0~60	0~167	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN60-167
	0~250	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN60-250
0~80	0~125	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN80-125
	0~187.5	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN80-187.5
0~100	0~100	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN100-100
	0~150	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN100-150
0~125	0~80	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN125-80
	0~120	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN125-120
0~150	0~66	9.9	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN150-66
	0~100	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN150-100

Output Voltage [Vdc]	Output Current [A]	Output Power [kW]	Interface					Dimensions	Model
			RS-232/ RS-485	Analogue	LAN	IEEE	Isolated analogue		
0~200	0~50	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN200-50
	0~75	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN200-75
0~250	0~40	10	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN250-40
	0~60	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN250-60
0~300	0~33	9.9	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN300-33
	0~50	15	•	•	◦	◦	◦	19" x 3U x 644 mm	GEN300-50
0~400	0~25	10	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN400-25
	0~37.5	15	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN400-37.5
0~500	0~20	10	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN500-20
	0~30	15	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN500-30
0~600	0~17	10.2	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN600-17
	0~25	15	•	•	◦	◦	◦	19" x 3U x 639 mm	GEN600-25
0~800	0~12.5	10	•	•	◦	◦	•	19" x 3U x 631 mm	GEN800-12.5
	0~18.8	15	•	•	◦	◦	•	19" x 3U x 631 mm	GEN800-18.8
0~1000	0~10	10	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1000-10
	0~15	15	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1000-15
0~1250	0~8	10	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1250-8
	0~12	15	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1250-12
0~1500	0~6.7	10	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1500-6.7
	0~10	15	•	•	◦	◦	•	19" x 3U x 631 mm	GEN1500-10

Interfaces: • = Standard
◦ = Optional

Warranty: 5 Years. Optional for all Models: USB external solution. Dimensions including Bus bar enclosure.

Product-Code

GEN 10/15kW 3U (7.5-600V)

GEN	-	10	-	1000	-		-	
Series Name		Output Voltage (0~10V)		Output Current (0~1000A)		Interface Options		AC Input Options

GEN 10/15kW 3U (800-1500V)

GEN	-	1500	-	10	-		-	
Series Name		Output Voltage (0~1500V)		Output Current (0~10A)		Interface Options		AC Input Options

Interface Options (Factory installed)

RS-232/RS-485 Interface, analogue Interface (non-isolated)

P/N:

-

Interface Options (Optional)

LAN Interface (Complies with **LXI** class C)

P/N:

LAN

IEEE 488.2 (GPIB) Interface

IEEE

0-5V/10V: analogue Interface (isolated) *7.5-600V only*

IS510

4-20mA: analogue Interface (isolated)

IS420

AC Input Options

P/N:

Three Phase 208Vac *7.5-600V only*

3P208

Three Phase 400Vac

3P400

Three Phase 480Vac

3P480



I-SINK – electronic power sink

Flexible, intelligent, reliable



I-SINK – 2 Quadrant-Extension to **Genesys™** and **GENESYS™** Series

TDK-Lambda's electronic power sink offers a flexible solution for various applications. The modular load concept enables the required power handling to be firmware configured to match the customer's requirement.

- **Modular load concept**

TDK-Lambda's electronic power sink can be fitted with up to 8 load modules. This allows a flexible choice of continuous power rating from 200W to 1.5kW, with a maximum peak power rating of up to 11.2kW for more than one or few seconds (depends on power).


- **Customised solution, rapid delivery**

The I-SINK is optimised to meet specific customer needs. The modular design shortens development time and offers the advantage of utilisation of proven technology for a customised solution.

- **Designed for flexible applications and optimised for TDK-Lambda Genesys™ and GENESYS™ Series**

Application examples

- 2-Quadrant-Extension
 - Battery test (charging and discharging options) and battery simulation
 - High performance load (each with power limit)
 - Constant current
 - Constant voltage (Power-Zener)
 - Constant resistance
-

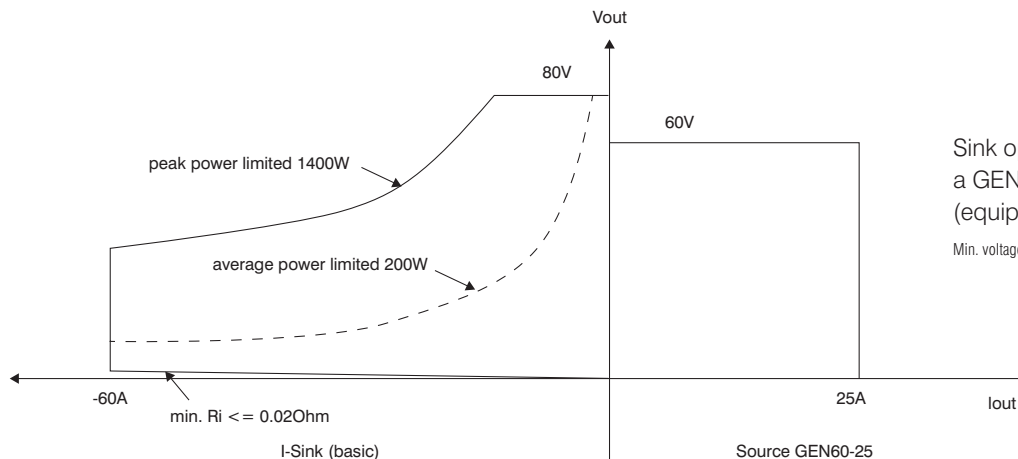

Sink operating mode diagram with
a GEN60-25 power supply unit
(equipped with one load module)

Min. voltage at max. current $< 0.15V$

Model	Performance per power block
Basic function	2 nd quadrant extension
Peak power / Continuous operation	1.4kW/200W
Max. voltage / max. current	80V/60A
Min. voltage at max. current	$< 0.15V$
Control interface	analogue 0-5V/0-10V
Operating temperature	0-30°C (without derating)

Profile/height	Max. number of models	Continuous operation	Peak power	Interface
2U	4	200-800W	1.4-5.6kW	USB/LAN/RS-232/RS-485/RS-422/CAN**
4U	8	1-1.5kW	7-11.2kW	USB/LAN/RS-232/RS-485/RS-422/CAN**

** could be combined with an additional interface



TDK-Lambda France SAS
3 avenue du Canada
Parc Technopolis – Bâtiment Sigma
91940 Les Ulis
France
Tel. +33 1 60 12 71 65
Fax +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via Giacomo Matteotti, 62
20092 Cinisello Balsamo (MI)
Italy
Tel. +39 02 61 29 38 63
Fax +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands
info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH
Karl-Bold-Strasse 40
77855 Achern
Tel. +49 7841 666 0
Fax +49 7841 5000
info@de.tdk-lambda.com
www.de.tdk-lambda.com



C.I.S.
Commercial Support:
Tel. +7 495 665-26 27
Technical Support:
St. Petersburg
Tel. +7 812 658-04 63
info@tdk-lambda.ru
www.tdk-lambda.ru



TDK-Lambda Ltd.
1 Alexander Yanai
Segula, Petah-Tikva
Israel
Tel. +9 723 902 4333
Fax. +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel. +43 2256 655 84
Fax +43 2256 645 12
info@at.tdk-lambda.com
www.at.tdk-lambda.com



Switzerland Sales Office
Eichtalstrasse 55
8634 Hombrechtikon
Switzerland
Tel. +41 44 850 53 53
Fax +41 44 850 53 50
info@ch.tdk-lambda.com
www.ch.tdk-lambda.com



Nordic Sales Office
Haderslevvej 36B
6000 Kolding
Denmark
Tel. +45 8853 8086
info@dk.tdk-lambda.com
www.dk.tdk-lambda.com



TDK-Lambda UK Ltd.
Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel. +44 12 71 85 66 66
Fax +44 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com

Local Distribution

hivolt.de GmbH & Co. KG
Oehleckerring 40
D-22419 Hamburg • Germany
Tel: +49 40 537122-0
Fax: +49 40 537122-99
info@hivolt.de • www.hivolt.de